


ExFlex®

Light weight and very flexible Thermoplastic Rubber ducting

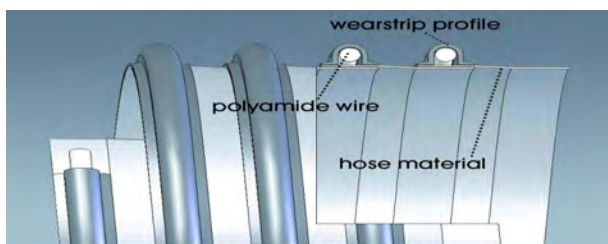

Dia. (mm)	Weight (kg/m)	Wall Thickness (mm)	Bending radius (mm)	Max. Vacuum (bar)
52	0,41	0,4	85	0,50
63	0,53	0,4	100	0,35
76	0,69	0,4	105	0,15
82	0,83	0,4	175	0,12
96	0,85	0,4	180	0,12
102	0,87	0,4	190	0,10
127	1,20	0,4	250	0,08
152	1,44	0,4	300	0,06

Further diameters available upon request.
Technical data are based on +20°C.

Material

Thermoplastic rubber coated-
polyester fabric

Wall Thickness

0.4mm

Colour

Black

Single Length

10m rolls/cut lengths to order

Temperature Resistance

-40° up to +150°C

Applications

Suction of exhaust fumes, chemical
fumes and gases even under
mechanical influence

Properties

- Excellent chemical resistance,
especially against oil and petrol fumes
- Fully crush recoverable
- Compatible with over floor reel
systems